

SPECIFICATIONS

PRETREATmaker LINE

All stations	11
Exhaust	Yes
Stations in dryer	6
Work stations operator	2
Heat press stations	2
PRETREAT station	1
LCD Touch-Display	10"
LAN/WIFI Connection	Integrated
Start up time	25 minutes
ECO mode	yes
Connection	3 x 400 vac
Power	34 kW 47 A
Compressed air	6 bar - 20l machine cycle
Weight / Weight (transport)	approx. 1460 kg/ approx. 1550kg
Dimensions	w 5,16 x d 2,00 x h 1,80 m
Dimensions (transport)	Box 1: w 1,20 x d 0,80 x h 1,40 m
	Box 2: w 4,40 x d 1,20 x h 1,80 m
	Box 3: w 1,20 x d 0,80 x h 1,40 m
	Box 4: w 1,20 x d 0,80 x h 1,40 m



2 Avenue De La Tessoualle
49312 CHOLET
Téléphone 02 41 65 85 32
Site Internet
www.maugin-sas.com

PRETREAT-Station

Spraying area	42 x 54,5 cm
Spraying method	Nozzles are moving over the table (inside)
Nozzles	5 pieces
Operating pressure	approx. 6 bar
Tank volume	1 x 60 l pretreat, 1 x 10l pretreat, 1 x 10 l water
Deposit tanks	1 x 10l
Exhaust air	Yes

Pneumatic heat press station

Platen size	42 x 54,5 cm
Pressure	max. 6 bar
Temperature	max. 220 °C
Temperature accuracy	± 0,5%
Exhaust	Yes

Drying tunnel

IR temperature max.	350 °C
Air circulation temperature	max. 200 °C
Exhaust air	Yes

SCHULZE



- UP TO 300 SHIRTS/HOUR
- READY TO PRINT
- CLEAN AND SAFE WORKING ENVIRONMENT THROUGH EXTRACTION

PRETREATmaker LINE

PRETREAT | DRY | AFTER-PRESS

- Automatic • High performance per hour • Compact and space-saving
- High quality standard • One operator needed only • Effortless working



SCHULZE


WALTER SCHULZE GMBH
Haberstraße 15 - 19 | 12057 Berlin | Germany
Tel. +49 30 68 29 54 - 0 | Fax +39 30 68 29 54 - 54
info@schulzeshop.com | www.schulzeshop.com

PRETREATMAKER.com

SCHULZESHOP.com

PRETREATmaker LINE

The PRETREATmaker LINE prepares textiles for textile printing by means of rotating mechanics and various processes. The machine combines all important processes „pre-treatment - drying - pressing“ in such a way that the user activates one process and all processes are carried out one after the other, thus greatly reducing the impression (halo effect) of the textiles. The design of the PRETREATmaker LINE machine allows it to be operated by one person.

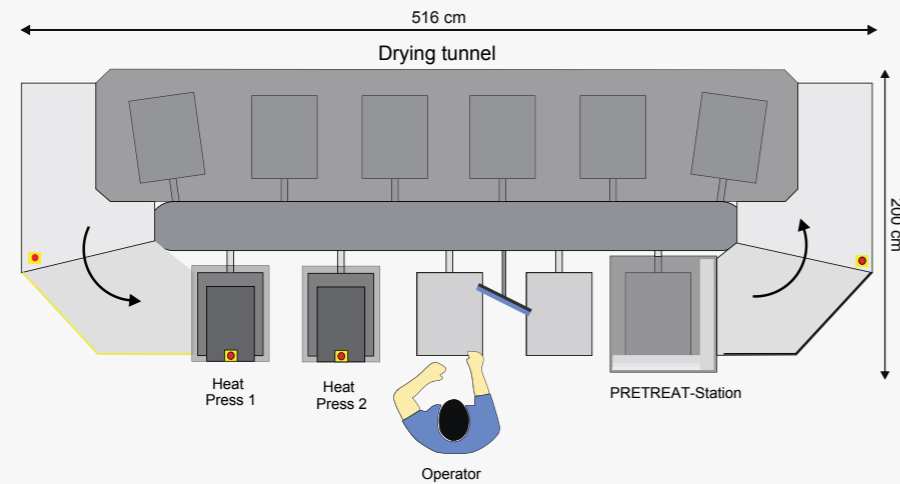

All panels are returned to point A of loading and can then be unloaded and reloaded, eliminating the need to travel to other machines. Thanks to its closed stations and compact design, the PRETREATmaker LINE is a clean and economical solution for pretreating textiles for direct textile printing.


Due to the programming capability via barcode, the machine can be assigned the correct setting for each textile. This information can be communicated via WIFI or LAN connection.

In a nutshell: All this makes it possible for one person to prepare industrial textile production quantities without having to use additional equipment.




 2 Avenue De La Tessoualle
 49312 CHOLET
 Téléphone 02 41 65 85 32
 Site Internet
 www.maugin-sas.com

PRETREAT STATION

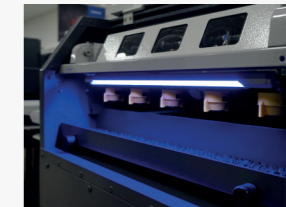

5 nozzels



Exhaust




Sensor activation



Touchscreen panel

PNEUMATIC HEAT PRESS STATION



Exhaust



DTG Baseplatten



Easy change of tanks



Safe storage for tanks

DRYING TUNNEL



Exhaust



Dripping liquid protection



Selfcleaning



Barcode option